

G01 Stereo Control Unit with Tuner



**Built-in AM/FM tuner
with RDS/RDBS**

**Seven stereo analogue
inputs**

**Unique dual-differential
volume control**

**Input level trim to match
different sources**

**Dual preamp outputs
for bi-amping**

**Trigger output for
external device control**

**Optional factory-fitted MC
or MM phono modules**

**The culmination of over 25
years of analogue system
design experience**

Meridian's G Series line of high performance digital & analogue consumer audio components feature a stylish cabinet design in traditional black or a sleek silver finish.

Designed to be either free-standing or rack-mounted, G Series components build on their predecessors, the multi-award-winning 500 and our flagship 800 Series, and include entirely new circuitry developed specifically for the G Series.

Multi-layer boards reduce system noise and improve performance. In products which include video capabilities, broadcast-quality, wide-bandwidth video components are employed for maximum image integrity.

G Series units are easy to use. Where appropriate, a knob is included to control volume. The positive-action front-panel keys are software-defined: their legends are presented in the vacuum fluorescent display and change intelligently according to context.

Full installation configuration of many G Series components is achieved by running a special setup program on a Windows computer, connected to the G Series unit via a serial link, or direct from the front panel.

G Series products also include serial ports for remote operation and configuration, along with infra-red sensor input and trigger capabilities, plus Meridian communications ports. A comprehensive back-lit learning/programmable remote is included with products other than amplifiers.

The Meridian G01 is a fully-integrated analogue control unit which includes a sensitive AM/FM RDS/RDBS tuner. It is an ideal complement for the G Series power amplifiers and is particularly suited to those who wish to maintain an analogue signal path at the very highest quality of reproduction.


Although Meridian is today best-known for its digital circuitry, it is a company built on analogue roots, and indeed, superb analogue circuit design and implementation are important parts of all Meridian products, whether their inputs and outputs are analogue or digital. The G01 rests, therefore, on over a quarter of a century of Meridian's experience in the design and manufacture of exquisite-sounding analogue hi-fi components and systems.

Including both a preamplifier and controller, the G01 stereo control unit provides no less than seven stereo analogue inputs plus an AM/FM tuner. The inputs are nominally designated Aux, CD, TV, Tape, Disc (turntable), DVD and VCR (though these designations can be changed). The disc input can be factory-configured for either moving coil or moving magnet cartridge operation: order the unit with the appropriate stereo input module.

A front-panel volume knob (press to mute) activates a specially-designed dual differentially-balanced volume control circuit. This ensures perfect stereo tracking and full frequency range performance at all volume levels.

BOOTHROYD STUART
MERIDIAN


G01 Stereo Control Unit with Tuner

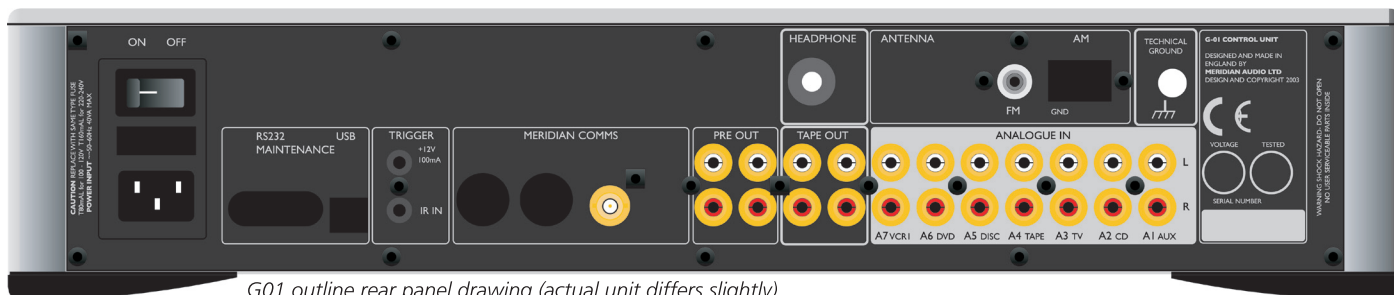

G01 outline rear panel drawing (actual unit differs slightly)

Outline Specifications

Distortion:	Less than 0.01% input to output	Headphone:	2V rms maximum output
Signal/Noise:	Better than -90dB for high-level analogue inputs. Better than -70dB for MM input. Better than -60dB for MC input	Comms:	Two 5-pin 240° DIN sockets, BNC socket, RS232 and USB comms interfaces
MM option:	Sensitivity adjustable 0.5-3mV rms for 5cm/s @ 1kHz. Overload point 47mV @ 1kHz. Cartridge load 47kΩ + 100 pF	Construction:	Meridian black or silver finish in metal & glass
MC option:	Sensitivity adjustable 38-210µV rms for 5cm/s @ 1kHz. Cartridge load 220Ω + 10nF	Dimensions:	Width: 440mm (17.32in); Depth: 350mm (13.78in) plus connectors; Height: 90mm (3.54in)
Tuner:	AM (Long/Medium Wave, 150-285/525-1605 kHz); FM (VHF Band II, 87.5-108 MHz), sensitivity 2.0µV. Configurable channel spacing & emphasis for US/EUR/ Japan, etc	Rack Mounting:	Kit available from Meridian authorized dealers
Inputs:	7 unbalanced on phono, 0.5-2.5V rms (impedance 20kΩ) in four steps	Weight:	8.5 kg (18.7 lbs)
Main Output:	2 unbalanced on phono, 0-3V rms maximum, 47Ω impedance	Controls:	Front-panel soft keys include control of Source, Copy, Mute, etc. Power and Display buttons, volume control. Full remote control of all features via MSR+. Meridian Comms, IR in, RS232, USB
Tape Output:	2 unbalanced on phono, 1.5V rms, 47Ω impedance	Trigger:	12V trigger output allows control of power amps, etc
		Display:	Multi-character dot-matrix Vacuum Fluorescent Display
		Power:	Versions: 100/115, 220/240 Vac, 50/60Hz, 8.4VA

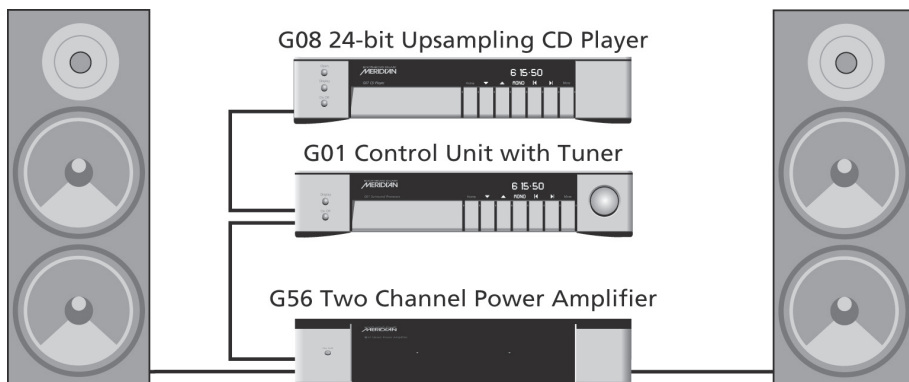

The G01 control unit is the perfect heart of a high-quality analogue stereo system. It is ideally paired with a source such as the G08 24-bit upsampling CD player. Amplification can be provided by the 2 x 100W G56 or the 2 x 200W G57, which can drive suitable third-party analogue loudspeakers.

Two sets of stereo tape outputs are provided, along with two preamp output pairs, allowing maximum flexibility in the configuration of tape/analogue decoder loops, multi-room and amplification/bi-amplification options.

In addition to the main outputs, a stereo headphone socket is provided on the rear panel for personal listening.

Information contained in this data sheet is correct as far as possible, but Meridian Audio accepts no liability for errors or omissions. Trademarks are the property of their respective owners. Meridian Audio reserves the right to amend product specifications at any time.

Further technical details, images, product reviews and company history are available from Meridian Audio or from our web site, www.meridian-audio.com

©Text & images 2003 Meridian Audio Ltd.

BOOTHROYD STUART
MERIDIAN

Meridian Audio Limited
Latham Road, Beaufort Park
Huntingdon, Cambridgeshire PE29 6YE
United Kingdom
Tel +44 (0) 1480 445678
Fax +44 (0) 1480 445686

Meridian America Inc
8055 Troon Circle, Suite C
Austell, Atlanta GA 30168-7849
USA
Tel +1 (404) 344 7111
Fax +1 (404) 346 7111

Email: info@meridian-audio.com
Web: www.meridian-audio.com